


SPECIFICATION			
NO	ITEM		CONTENT
1	For Sensor		1/2.7
2	MAX IMAGE CIRCLE		Ø7.4
3	EFL		4±5%
4	OPTICAL BFL (BFL)		4.2±0.1
5	MECHANICAL BFL (MBFL)		3.75±0.1
6	F/NO		1±5%
7	Field of View	Diagonal	105.3° Y=6.61
		Horizontal	89° Y=5.76
		Vertical	46.5° Y=3.24
8	OPTICAL Distortion		<-36%
9	Relative Illumination		>45%
10	CHIEF RAY ANGLE		15°
11	Total Length		22.56±0.1
12	CONSTRUCTION		7E
13	Mount		M12
14	CUT FREQUENCY AT 50%N		650±10nm
15	Hoder Material		PC+GF
16	Operation Temperature		-20℃~70℃
17	Storage temperature		-40℃~85℃

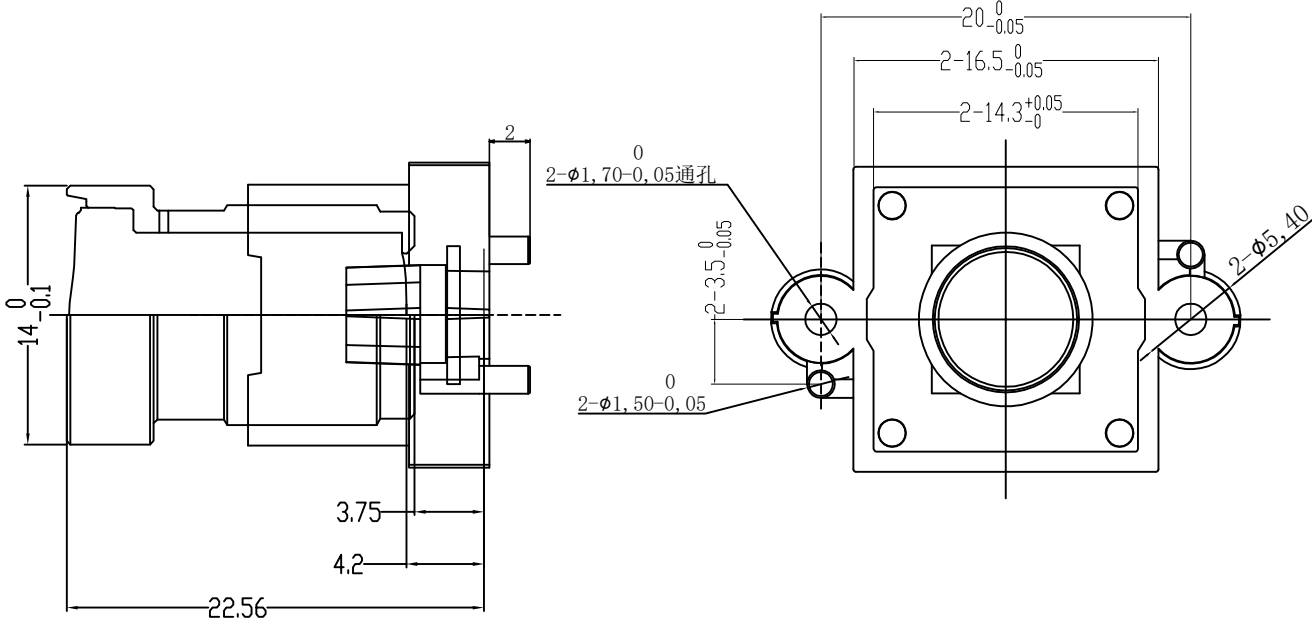

△3					ANGLE	±0.5°	江西帛视智能科技有限公司			
△2					X. XXX	±0.01				
△1					X. XX	±0.03				
标记	更改内容				担当	时间	X. X	±0.1	比例	—
承认	审核	设计	制图			范围	尺寸	材料	—	单位
				机种编号				部品名称	规格书	
				PL100-IR650H10				部品编号	—	版次
									1	

文件编号:PL10020250303003